

DriPak® GX


POCKET FILTER

Features and Benefits

- ISO 16890: ePM1, ePM2,5 and ePM10
- Low pressure drop and a moderate energy consumption
- High filtration efficiency for an improved indoor air quality

Applications

Intended for regular airflow based commercial, industrial and institutional applications and pre-filtration for cleanrooms

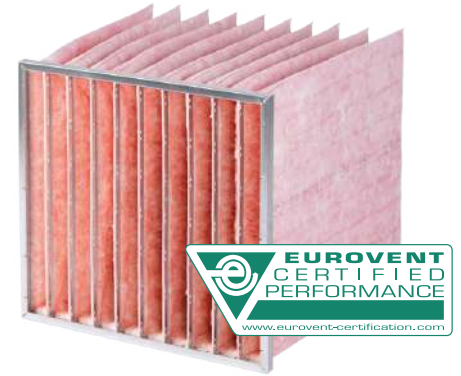


Configurations

Filter media	Glass
Pocket design	Stitched, tapered
Gasket	Neoprene
Header standard material	Plastic 25 mm, Galvanized steel 25 mm. Optional: Galvanized Steel 20 mm.
Max. Operating Temperature	70 °C
Recom. final pressure drop	Subject to optimization of lifecycle costs, max 450 Pa
Recom. airflow range	75% - 125% (of nominal airflow)
Moisture resistance	100% relative humidity


Standard dimensions (Width x Height)

Dimension	592x592	490x592	287x592	592x490	592x287	287x287	490x490	287x892	490x892	592x892
Depth	635 + 525 + 360									
Pockets ePM10	6+8+10	5+6+8	3+4+5	6+8+10	6+8+10	3+4+5	8	4	6	8
Pockets ePM1	6+8+10	5+6+8	3+4+5	6+8+10	6+8+10	3+4+5	8	5	8	8

Performance ePM10 60% with 6 and 8 pockets, P-Marking: 399401-05

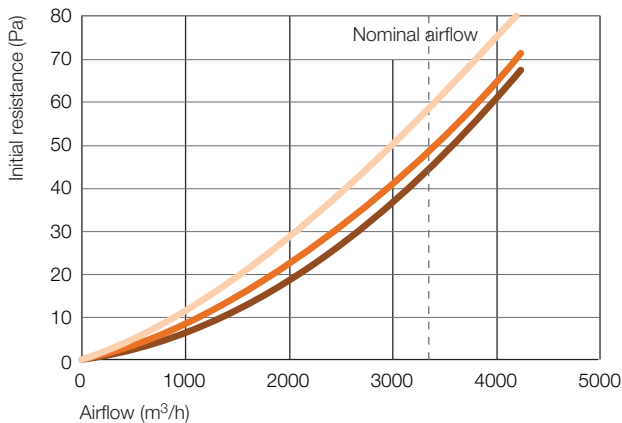


DriPak GX - ePM10 60% 592x592x360/6 pockets / ePM10 60% 592x592x525/6 pockets / ePM10 60% 592x592x635/6 pockets

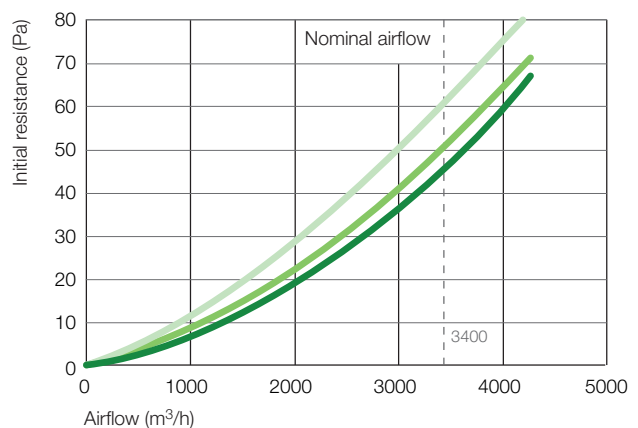

DriPak GX - ePM10 60% 592x592x360/8 pockets / ePM10 60% 592x592x525/8 pockets / ePM10 60% 592x592x635/8 pockets


DriPak[®] GX Filter

Performance ePM10 60% with 10 pockets, P-Marking: 399401-05

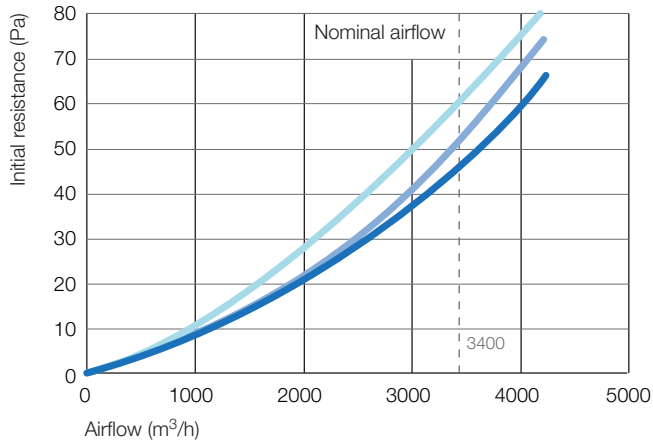


DriPak GX - ePM10 60% 592x592x360/10 pockets / ePM10 60% 592x592x525/10 pockets / ePM10 60% 592x592x635/10 pockets


Performance ePM2,5 50% with 6, 8 and 10 pockets, P-Marking: C000881

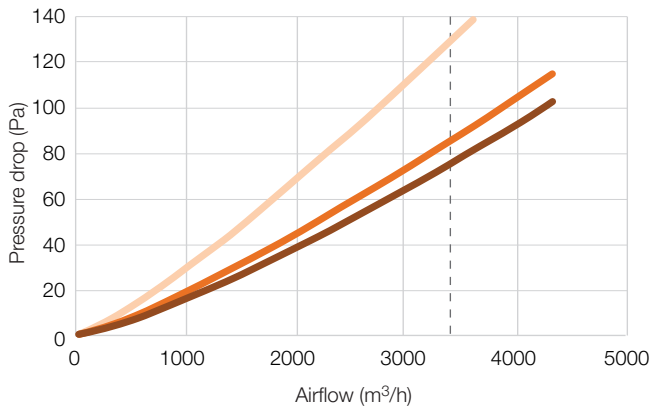

DriPak GX - ePM2,5 50% 592x592x360/6 pockets / ePM2,5 50% 592x592x525/6 pockets / ePM2,5 50% 592x592x635/6 pockets

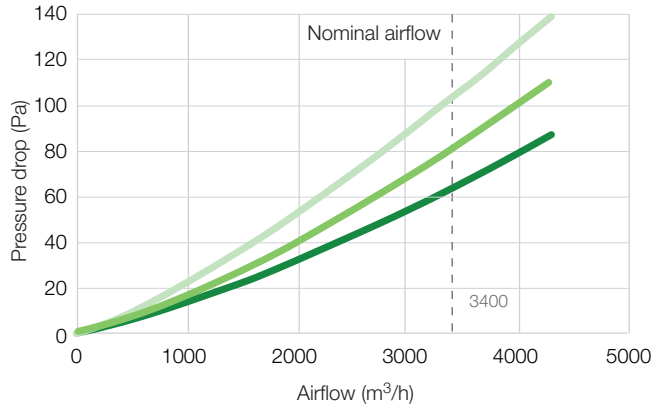


DriPak GX - ePM2,5 50% 592x592x360/8 pockets / ePM2,5 50% 592x592x525/8 pockets / ePM2,5 50% 592x592x635/8 pockets

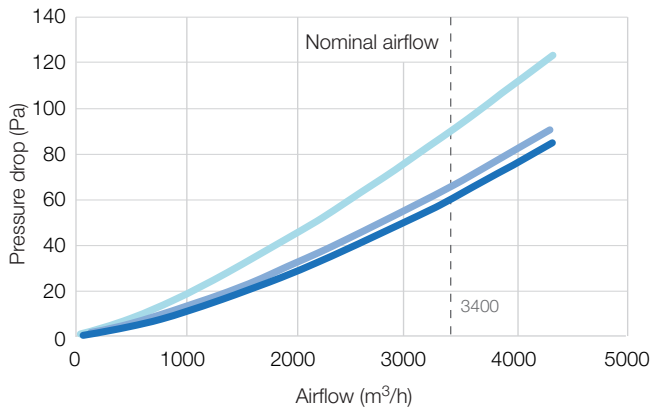


DriPak GX - ePM2,5 50% 592x592x360/10 pockets / ePM2,5 50% 592x592x525/10 pockets / ePM2,5 50% 592x592x635/10 pockets

DriPak[®] GX Filter

Performance ePM1 55% with 8 and 10 pockets

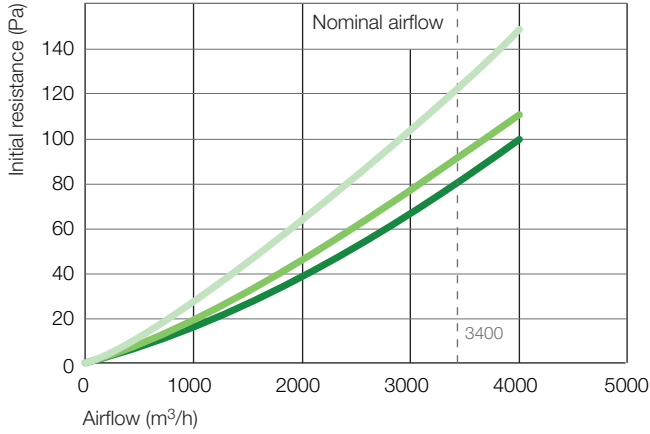


DriPak GX - ePM1 55% 592x592x360/8 pockets / ePM1 55% 592x592x525/8 pockets / ePM1 55% 592x592x635/8 pockets

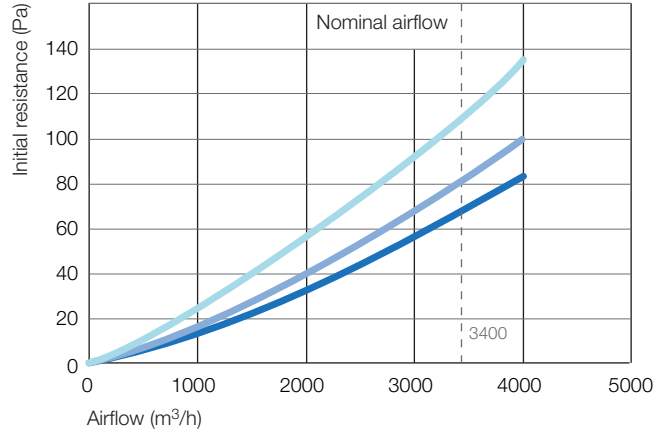


DriPak GX - ePM1 55% 592x592x360/10 pockets / ePM1 55% 592x592x525/10 pockets / ePM1 55% 592x592x635/10 pockets

Performance ePM1 65% with 8 and 10 pockets, P-Marking: 399401-02

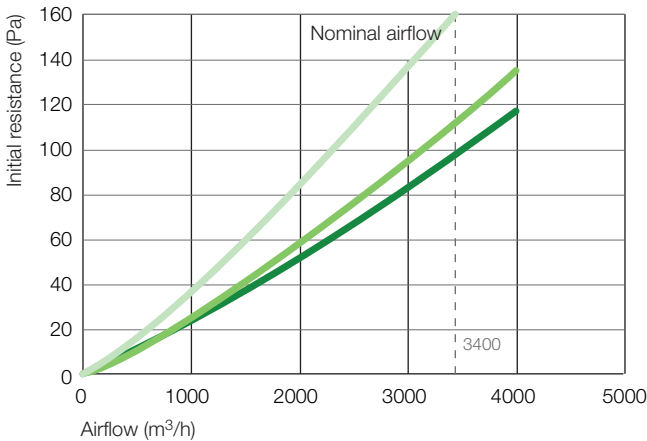


DriPak GX - ePM1 65% 592x592x360/8 pockets / ePM1 65% 592x592x525/8 pockets / ePM1 65% 592x592x635/8 pockets

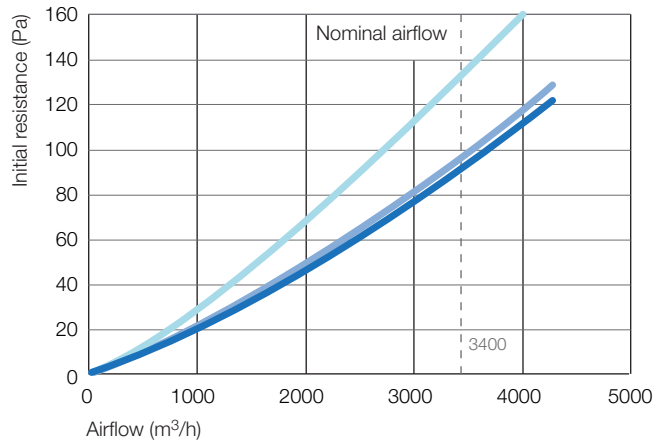


DriPak GX - ePM1 65% 592x592x360/10 pockets / ePM1 65% 592x592x525/10 pockets / ePM1 65% 592x592x635/10 pockets

Performance ePM1 85% with 8 and 10 pockets, P-Marking: 399401-03

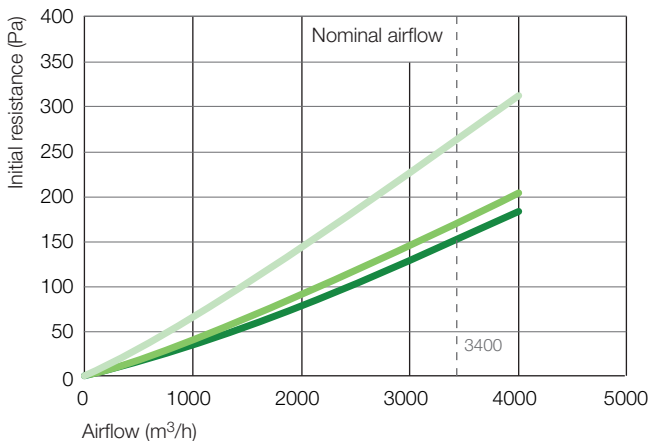


DriPak GX - ePM1 85% 592x592x360/8 pockets / ePM1 85% 592x592x525/8 pockets / ePM1 85% 592x592x635/8 pockets

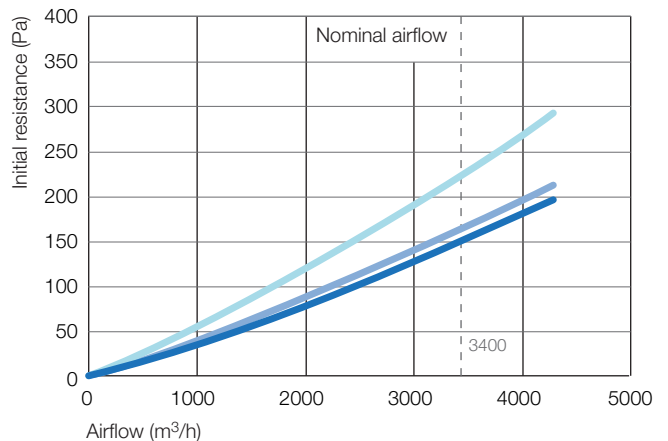


DriPak GX - ePM1 85% 592x592x360/10 pockets / ePM1 85% 592x592x525/10 pockets / ePM1 85% 592x592x635/10 pockets

DriPak® GX Filter

Performance ePM1 90% with 8 and 10 pockets, P-Marking: SC1182-13

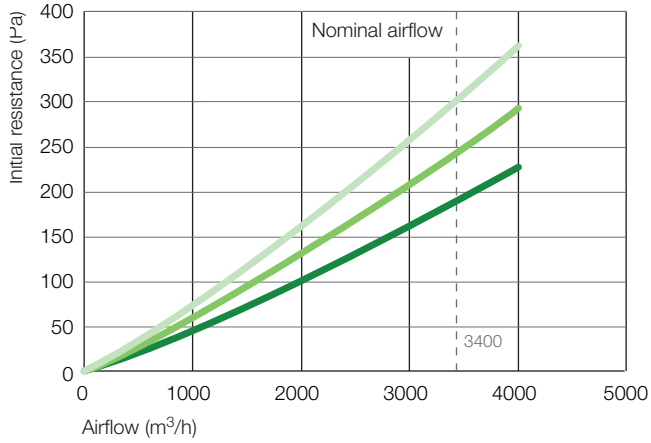

DriPak GX - ePM1 90% 592x592x360/8 pockets / ePM1 90% 592x592x525/8 pockets / ePM1 90% 592x592x635/8 pockets

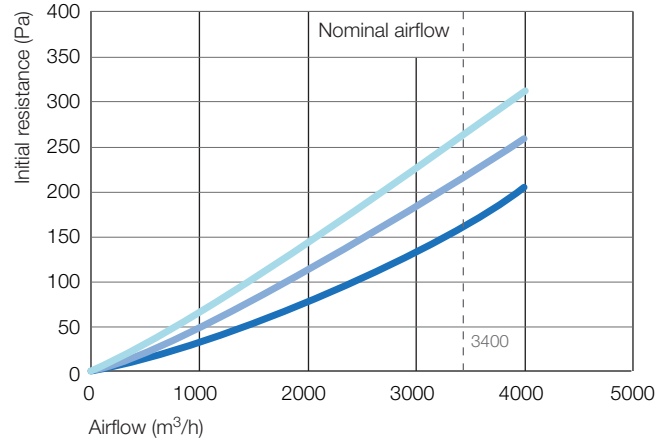

DriPak GX - ePM1 90% 592x592x360/10 pockets / ePM1 90% 592x592x525 10 pockets / ePM1 90% 592x592x635/10 pockets

Technical data

Filter name	Dimensions (mm) 592 x 592 x Depth	Filter area (m ²)	Number of pockets	Initial dp (Pa) @ 3400 m ³ /h	Prev. rated EN779:2012			ISO 16890 Classification	ePM1 (%)	ePM2,5 (%)	ePM10 (%)
						kWh	Energy Rating				
DriPak GX ePM10 60%	635	4,3	6	45	M5	600	A	ePM10 60%	15	25	63
	525	3,6	6	50	M5	700	B	ePM10 60%	15	25	63
	360	2,4	6	60	M5	1350	E	ePM10 60%	15	25	63
DriPak GX ePM10 60%	635	5,8	8	45	M5	560	A	ePM10 60%	15	25	63
	525	4,7	8	50	M5	680	B	ePM10 60%	15	25	63
	360	3,2	8	60	M5	1150	D	ePM10 60%	15	25	63
DriPak GX ePM10 60%	635	7,2	10	45	M5	530	A	ePM10 60%	15	25	63
	525	5,9	10	50	M5	650	B	ePM10 60%	15	25	63
	360	4,0	10	60	M5	1050	D	ePM10 60%	15	25	63
DriPak GX ePM2,5 50%	635	4,3	6	75	n/a	1000	C	ePM2,5 50%	40	54	84
	525	3,6	6	85	n/a	1160	C	ePM2,5 50%	40	54	84
	360	2,4	6	130	n/a	1950	E	ePM2,5 50%	40	54	84
DriPak GX ePM2,5 50%	635	5,8	8	65	n/a	800	A	ePM2,5 50%	40	54	84
	525	4,7	8	80	n/a	1070	C	ePM2,5 50%	40	54	84
	360	3,2	8	105	n/a	1430	D	ePM2,5 50%	40	54	84
DriPak GX ePM2,5 50%	635	7,2	10	60	n/a	770	A	ePM2,5 50%	40	54	84
	525	5,9	10	65	n/a	870	B	ePM2,5 50%	40	54	84
	360	4,1	10	90	n/a	1210	C	ePM2,5 50%	40	54	84
DriPak GX ePM1 55%	635	5,8	8	80	F7	990	B	ePM1 55%	55	66	88
	525	4,7	8	90	F7	1090	C	ePM1 55%	55	66	88
	360	3,2	8	120	F7	1900	D	ePM1 55%	55	66	88

DriPak® GX Filter

Technical data

Filter name	Dimensions (mm) 592 x 592 x Depth	Filter area (m²)	Number of pockets	Initial dp (Pa) @ 3400 m³/h	Prev. rated EN779:2012	Acc. to Eurovent 4/21:2018			Average values		
						kWh	Energy Rating	ISO 16890 Classification	ePM1 (%)	ePM2,5 (%)	ePM10 (%)
DriPak GX ePM1 55%	635	7,2	10	65	F7	790	A+	ePM1 55%	55	66	88
	525	5,9	10	80	F7	970	B	ePM1 55%	55	66	88
	360	4,0	10	110	F7	1550	D	ePM1 55%	55	66	88
DriPak GX ePM1 65%	635	4,3	6	140	F7	> 2050	E	ePM1 65%	67	75	92
	525	3,6	6	150	F7	> 2050	E	ePM1 65%	67	75	92
	360	2,4	6	180	F7	> 2050	E	ePM1 65%	67	75	92
DriPak GX ePM1 65%	635	5,8	8	95	F7	1150	C	ePM1 65%	67	75	92
	525	4,7	8	110	F7	1280	C	ePM1 65%	67	75	92
	360	3,2	8	160	F7	2100	E	ePM1 65%	67	75	92
DriPak GX ePM1 65%	635	7,2	10	90	F7	1070	B	ePM1 65%	67	75	92
	525	5,9	10	95	F7	1150	C	ePM1 65%	67	75	92
	360	4,0	10	130	F7	2040	D	ePM1 65%	67	75	92
DriPak GX ePM1 85%	635	4,3	6	260	F8	> 2400	E	ePM1 85%	85	90	97
	525	3,6	6	270	F8	> 2400	E	ePM1 85%	85	90	97
	360	2,4	6	290	F8	> 2400	E	ePM1 85%	85	90	97
DriPak GX ePM1 85%	635	5,8	8	150	F8	1790	C	ePM1 85%	85	90	97
	525	4,7	8	170	F8	1980	D	ePM1 85%	85	90	97
	360	3,2	8	260	F8	> 2400	E	ePM1 85%	85	90	97
DriPak GX ePM1 85%	635	7,2	10	145	F8	1750	C	ePM1 85%	85	90	97
	525	5,9	10	160	F8	1950	D	ePM1 85%	85	90	97
	360	4,0	10	220	F8	> 2400	E	ePM1 85%	85	90	97
DriPak GX ePM1 90%	635	4,3	6	280	F9	> 2500	E	ePM1 90%	91	94	98
	525	3,6	6	300	F9	> 2500	E	ePM1 90%	91	94	98
	360	2,4	6	320	F9	> 2500	E	ePM1 90%	91	94	98
DriPak GX ePM1 90%	635	5,8	8	190	F9	2300	D	ePM1 90%	91	94	98
	525	4,7	8	240	F9	> 2500	E	ePM1 90%	91	94	98
	360	3,2	8	300	F9	> 2500	E	ePM1 90%	91	94	98
DriPak GX ePM1 90%	635	7,2	10	160	F9	1900	C	ePM1 90%	91	94	98
	525	5,9	10	215	F9	2600	E	ePM1 90%	91	94	98
	360	4,0	10	290	F9	> 2500	E	ePM1 90%	91	94	98

Further dimensions are available on request. From January 1st 2018 filtration efficiency values are certified according to ISO 16890.

For a complete
overview of
P-marked variants
please visit
www.ri.se



Dinair
An AAF Company

AAF
INTERNATIONAL
Bringing clean air to life:
AAF International
European Headquarters
Odenwaldstrasse 4, 64646 Heppenheim
Tel: +49 (0)6252 69977-0
aafintl.com

DriPak® is a registered trademark of AAF International in the U.S. and other countries.

Specifications and performance data contain average values within existing production specification tolerances and are subject to change without prior notice. AAF explicitly rejects any liability for any direct or indirect damage, arising from or related to the use and/or interpretation of this information.

©2020 AAF International and
its affiliated companies.
PF_303_EN_032020